



# HYBRID STEPPING MOTOR MOD. 11HY5610

□ COLORS OF LEAD WIRES



□ DIMENSIONS unit=mm

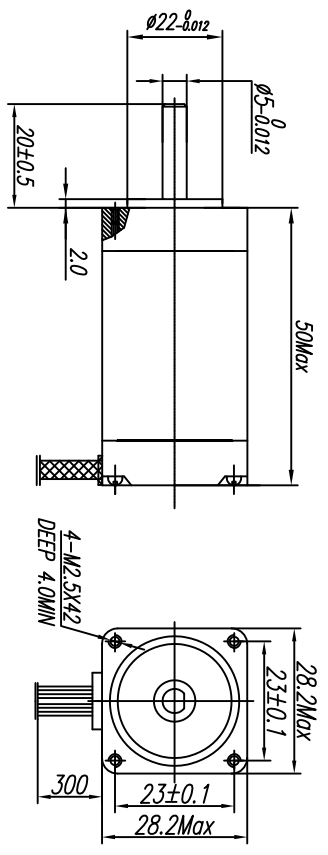

□ SPECIFICATIONS

PHASE	相数	2	PHASE	COMMENT
STEP ANGLE	步距角	1.8<math>\pm 5\%</math>	*/STEP	
VOLTAGE	静电压	4.37	V	
CURRENT	电流	0.95	A/PHASE	
RESISTANCE	电阻	4.6 <math>\pm 10\%</math>	$\Omega$ /PHASE	
INDUCTANCE	电感	1.6 <math>\pm 20\%</math>	mH/PHASE	
HOLDING TORQUE	静转矩	9.0	Ncm Min	
DETENT TORQUE	定位转矩	0.8	Ncm Max	
INSULATION CLASS	绝缘等级	B		
LEAD STYLE	引出线规格	AWG26 UL1007		

设计	20070718	审核		技术规范书	SYS MOTOR
工艺		批准			
				版本 NR	共 页

1 2 3 4