
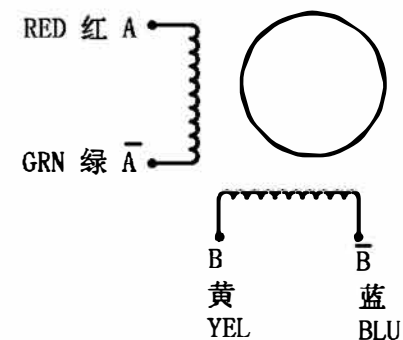
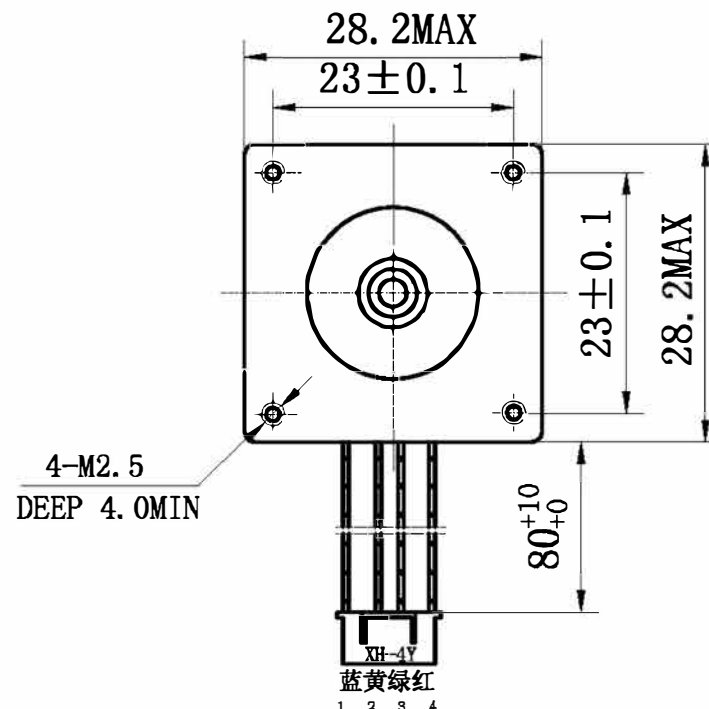


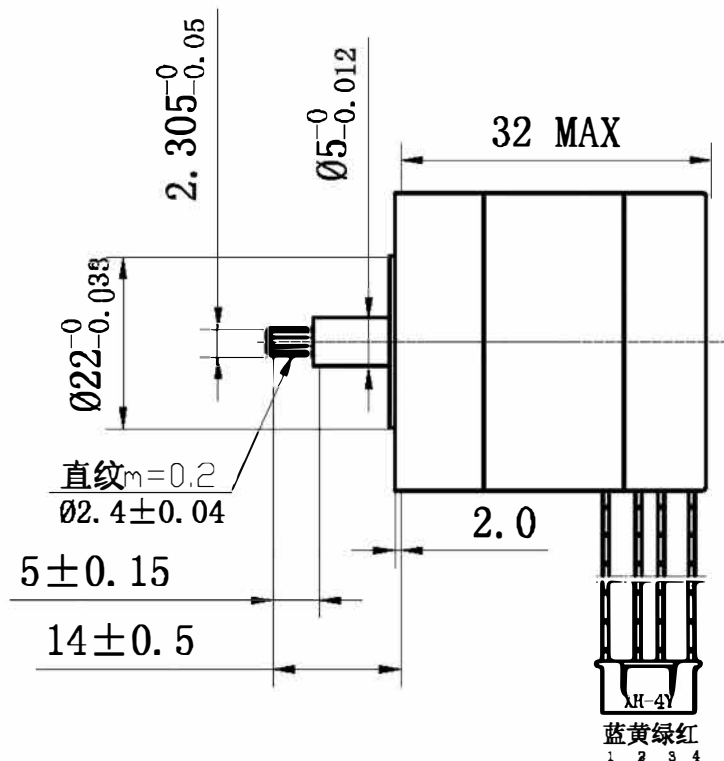

电气特性参数/ELECTRICAL PARAMETER

相 数/NO. OF PHASES	2
步 距 角/STEP ANGEL	$1.8^\circ \pm 5\%$
电 压/RATED VOLTAGE	3.48 V
电 流/RATED CURRENT	0.67 A
电 阻/RESISTANCE	$5.2 \text{ ohm} \pm 10\%$ AT 20° C
电 感/INDUCTANCE	$3.4 \text{ mH} \pm 20\%$ AT $1 \text{ kHz}, 1 \text{ V}_{\text{rms}}$
静转矩/HOLDING TORQUE	0.06 N.m以上/MIN.
定位转矩/DETENT TORQUE	0.4 N.cm以下/Max
转动惯量/ROTOR INERTIA	$9 \text{ g} \cdot \text{cm}^2$
引出线规格/LEAD STYLE	AWG26 UL1061
绝缘等级/INSULATION CLASS	CLASS B
绝缘耐压/DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻/INSULATION RESISTANCE	100 MΩ 以上/MIN.
允许轴向负载/ALLOWABLE THRUST LOAD	2 N
允许径向负载/ALLOWABLE RADIAL LOAD	20 N (轴端/ON THE SHAFT END)

备注/NOTE):

技术部
2019.10.16
张建伟

D					技术规格书 TECHNICAL SPECIFICATION	SYS MOTOR	
C						一般公差 TOLERANCE	$\pm 0.3 / \pm 0.3^\circ$
B						比例 SCALE	2:1
A	2019.10.16		更新	Van		单位 UNIT	mm
版本 REV.	年 月 日 DATE	变更番号 ECN	变 更 内 容 REVISIONS	设计 BY	11HS3406L14-X1	页 SHEET	1/1
设 计/DESIGNED					型号 MODEL	三视图 THIRD ANGLE PROJECTION	
审 核/CHECKED					编码 CODE		
工 艺/TECHNICS							
批 准/APPROVED							